


Chalet 190






technical data sheet

EN

Product specifications

Three-layer parquet	EN 13489	DoP PQ2025-15
Size	Plank	190 x 600-1900 x 14(3) mm
	Box	8 planks / 2,888 m ² / 23,4 kg
	Full planks	6
	Pallet	45 boxes / 129,96 m ² / 1035 kg
Density	EN 323	± 530 kg/m ³
Installation		Drop Lock
Top layer		European oak (Quercus robur/ Quercus petraea)
Core		Poplar (Populus euramericana)
Counter balance		Poplar (Populus euramericana)
Grading		Rustic B+
Texture		Slightly Brushed
Bevel		4V
Gloss level at 60°		5-7 %
Finishing		Oxidative Oil
Warranty conditions	Residential warranty	20 years
	Commercial warranty	upon request
Use class	EN 13489	Class 23 Heavy domestic use 

Product properties

property	test method	min. req.	result
Indoor air certifications			REACH, A
Reaction to fire	 EN 13501-1		Dfl-s1
Slip resistance	 CEN/TS 15676		Dry 100, Wet 43
Formaldehyde emission	 EN 717-1	≤ 0.124	E1
Pentachlorophenol content	 CEN/TR 14823	< 5 ppm	Does not contain pentachlorophenol
Underfloor heating	 EN 12664	R < 0.15 m ² K/W	R = 0,12 OK (max +28°C) + glued
Biological durability			Class 1

Cleaning and maintenance instructions: www.lamett.eu



The mark of
responsible forestry
FSC® C151862


Chalet 190

Rustic B+

EN

Grading description

Texture	Slightly Brushed
Grading	Very rustic
Colour variation	High
Sound knots	Allowed unlimited
Unsound knots	Allowed, $\varnothing < 40$ mm
Sapwood	< 1/3 of the width
End crack	Allowed
Surface crack	Allowed
Insect hole	Not allowed
Decay	Not allowed
Blue/yellow stain	Allowed
Sound heart	Allowed
Machine marks	Not allowed

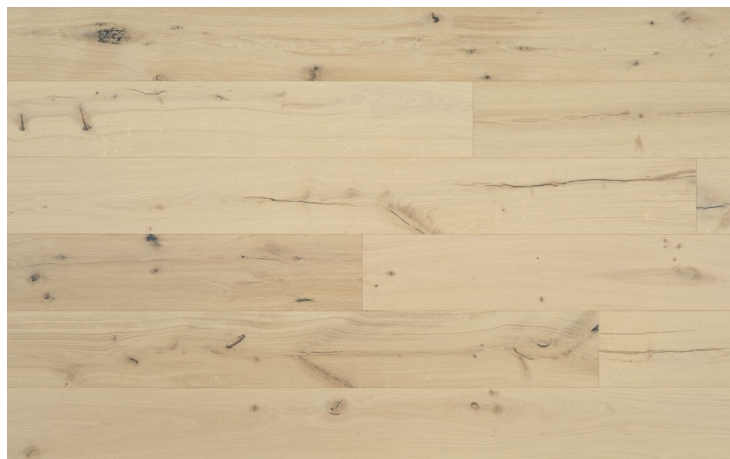

This picture is an indication of the grading as described.

Grading description

Scale from (rigid) parquet without knots up to planks with more and larger knots

From little colour variation/sapwood to bigger colour variation/sapwood

