

Portofino 190

25-02-2026

technical data sheet

EN

Product specifications

Three-layer parquet	EN 13489	DoP PQ2021-5
Size	Plank	190 x 400-1900 x 14(3) mm
	Box	6 planks / 2.166 m ² / 15.65 kg
	Full planks	5
	Pallet	50 boxes / 108.3 m ² / 802.5 kg
Density	EN 323	± 650 kg/m ³
Installation		Tongue & Groove
Top layer		European oak (Quercus robur)
Core		Poplar (Populus deltoides)
Counter balance		Poplar (Populus deltoides)
Grading		Rustic A
Texture		Slightly Brushed
Bevel		2V Microbevel
Gloss level at 60°		4-6 %
Finishing		UV Oil
Warranty conditions	Residential warranty	20 years
	Commercial warranty	upon request
Use class	EN 13489	Class 23 Heavy domestic use



Product properties

property	test method	min. req.	result
Indoor air certifications			REACH, A
Reaction to fire	 EN 13501-1		Dfl-s1
Slip resistance	 CEN/TS 15676		Dry 54
Formaldehyde emission	 EN 717-1	≤ 0.124 mg/m ³	E1
Pentachlorophenol content	 CEN/TR 14823	< 5 ppm	Does not contain pentachlorophenol
Underfloor heating	 EN 12664	R < 0.15 m ² K/W	R = 0,10 m ² K/W OK (max +28°C) + glued
Biological durability			Class 1

Cleaning and maintenance instructions: www.lamett.eu



Portofino 190


25-02-2026

Rustic A

EN

Grading description

Texture	Slightly Brushed
Grading	Slightly rustic
Colour variation	Low
Sound knots	≤ 2 per plank, Ø ≤ 35 mm
Unsound knots	≤ 2 per plank, Ø ≤ 20 mm
Sapwood	≤ 30 mm, ≤ 20% of width
End crack	< 3 mm wide, < 150 mm long
Surface crack	Not allowed
Insect hole	Not allowed
Decay	Not allowed
Blue/yellow stain	Not allowed
Sound heart	Not allowed
Machine marks	Not allowed

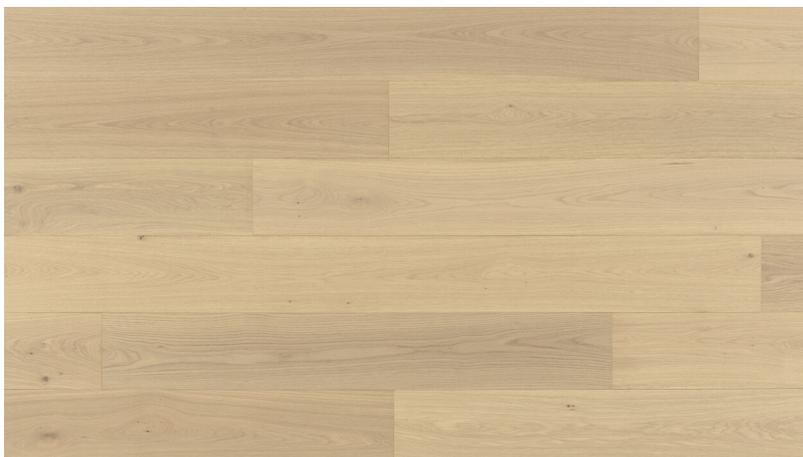

This picture is an indication of the grading as described.

Grading description

Scale from (rigid) parquet without knots up to planks with more and larger knots



From little colour variation/sapwood to bigger colour variation/sapwood

