

# Farm Herringbone 125

## technical data sheet

EN

### Product specifications

Multilayer parquet	EN 13489	DoP PQ2021-1
Size	Plank	125 x 625 x 15(3) mm
	Box	16 planks / 1.25 m <sup>2</sup> / 11.5 kg
	Pallet	64 boxes / 80 m <sup>2</sup> / 756 kg
Density	EN 323	± 600 kg/m <sup>3</sup>
Installation		Tongue & Groove
Top layer		European oak (Quercus robur)
Core		Poplar (Populus spp.)
Counter balance		Poplar (Populus spp.)
Grading		Rustic B+
Texture		Brushed & Scraped
Bevel		Aged bevel 4V
Gloss level at 60°		5-7 %
Finishing		UV Oil (Pure colour), Oxidative Oil (other colours)
Warranty conditions	Residential warranty	20 years
	Commercial warranty	upon request
Use class	EN 13489	Class 23 Heavy domestic use 

### Product properties

property	test method	min. req.	result
Indoor air certifications			REACH, A
Reaction to fire	 EN 13501-1		Dfl-s1
Slip resistance	 CEN/TS 15676		Low risk
Formaldehyde emission	 EN 717-1	≤ 0.124 mg/m <sup>3</sup>	E1
Pentachlorophenol content	 CEN/TR 14823	< 5 ppm	Does not contain pentachlorophenol
Underfloor heating	 EN 12664	R < 0.15 m <sup>2</sup> K/W	R = 0,12 m <sup>2</sup> K/W OK (max +28°C) + glued
Biological durability			Class 1

Cleaning and maintenance instructions: [www.lamett.eu](http://www.lamett.eu)




# Farm Herringbone 125

Rustic B+

EN

## Grading description

Texture	Brushed & Scraped
Grading	Very rustic
Colour variation	High
Sound knots	Allowed unlimited
Unsound knots	Partially filled
Sapwood	Allowed unlimited
End crack	Allowed unlimited
Surface crack	Allowed unlimited
Insect hole	< 3 mm; 8/400mm partially filled
Decay	Not allowed
Blue/yellow stain	Allowed
Sound heart	Allowed
Machine marks	Not allowed

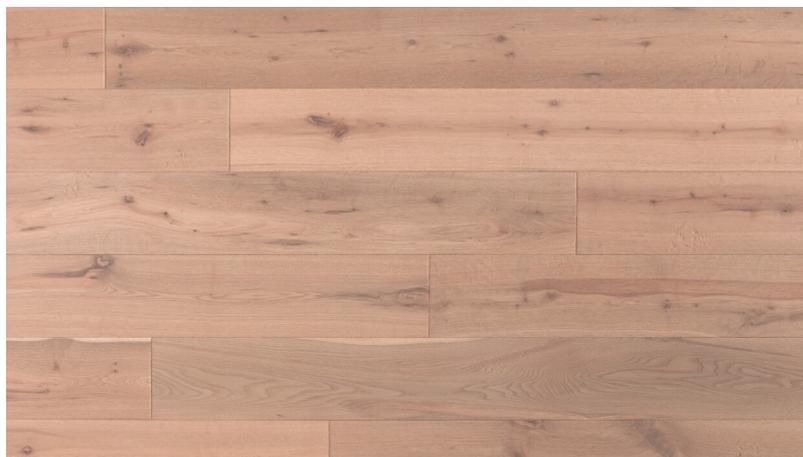

This picture is an indication of the grading as described.

## Grading description

Scale from (rigid) parquet without knots up to planks with more and larger knots

From little colour variation/sapwood to bigger colour variation/sapwood

