

Narvik 190

technical data sheet

EN

Product specifications

Three-layer parquet	EN 13489	DoP PQ2021-1
Size	Plank	190 x 600-1900 x 14(3) mm
	Box	8 planks / 2.888 m ² / 22.8 kg
	Full planks	6
	Pallet	40 boxes / 115.52 m ² / 960 kg
Density	EN 323	± 600 kg/m ³
Installation		Drop Lock
Top layer		European oak (Quercus robur)
Core		Poplar (Populus spp.)
Counter balance		Poplar (Populus spp.)
Grading		Rustic AB
Texture		Slightly Brushed
Bevel		4V
Gloss level at 60°		5-7 %
Finishing		UV Oil
Warranty conditions	Residential warranty	20 years
	Commercial warranty	upon request
Use class	EN 13489	Class 23 Heavy domestic use



Empty fields indicate variations between the colors within the collection. Please refer to the table below for specific data per color.

Variables within the collection

Article Code	Colour	Finish	Texture
NARV 190-975	975 - Blonde	Oil	Slightly Brushed
NARV 190-976	976 - Chamois	Oil	Slightly Brushed
NARV 190-977	977 - Umber	Oil	Slightly Brushed
NARV 190-978	978 - Coyote	Oil	Slightly Brushed
NARV 190-979	979 - Peru	Oil	Slightly Brushed
NARV 190-980	980 - Sepia	Oil	Slightly Brushed

Narvik 190

technical data sheet

EN

Product properties

property		test method	min. req.	result
Indoor air certifications/labels				A
Reaction to fire		EN 13501-1		Dfl-s1
Slip resistance		CEN/TS 15676		Low risk
Pentachlorophenol content		CEN/TR 14823	< 5 ppm	Does not contain pentachlorophenol
Underfloor heating		EN 12664	R < 0.15 m²K/W	R= 0.11 m²K/W OK (max +28°C) + glued
Biological durability				Class 1

Formaldehyde emission

CE-Marking - EN 14342		EN 717-1	≤ 0.124 mg/m³	E1
REACH Annex XVII Entry 77		EN 717-1	0.062 mg/m³	0.009 mg/m³




Narvik 190

Rustic AB

EN

Grading description

Texture	Slightly Brushed
Grading	Rustic
Colour variation	Medium
Sound knots	Allowed unlimited; Ø < 30 mm
Unsound knots	≤ 3 per plank ; Ø < 20 mm
Sapwood	< 20% of the width
End crack	< 100 mm length, <3 mm width
Surface crack	On the knots, < 5 mm width
Insect hole	< 2 mm; 8/400 mm partially filled
Decay	Not allowed
Blue/yellow stain	Not allowed
Sound heart	Not allowed
Machine marks	Not allowed

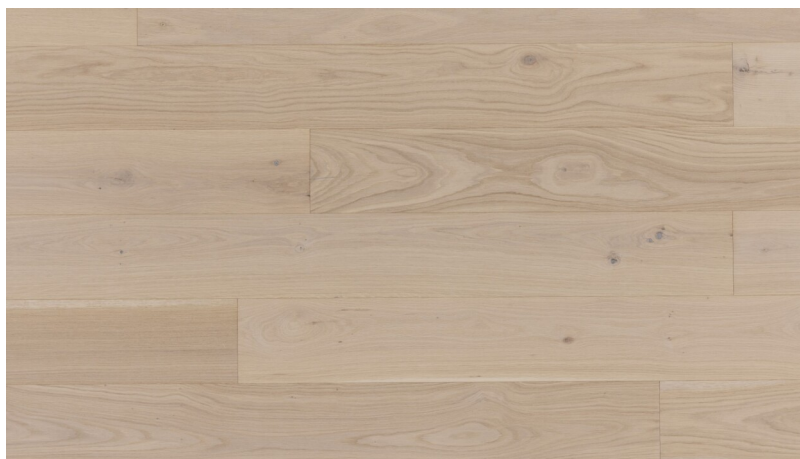

This picture is an indication of the grading as described.

Grading description – 2 criteria

Knots

Scale from (rigid) parquet without knots up to planks with more and larger knots

Colour variation

From little colour variation/sapwood to bigger colour variation/sapwood

Cleaning and maintenance instructions: www.lamett.eu